

尺寸: 70X100MM，材质：100g书纸，1C+1C，风琴折页

DRA-3550

Smart Coffee Table Speaker w/Wireless Charger

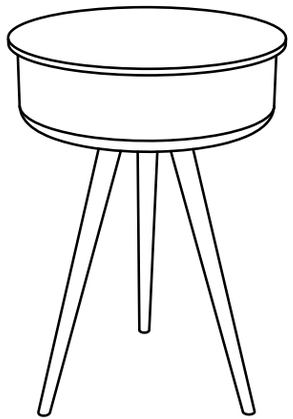

User manual

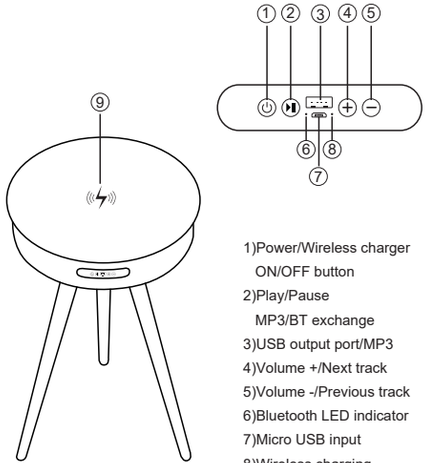

1)Power/Wireless charger ON/OFF button
2)Play/Pause MP3/BT exchange
3)USB output port/MP3
4)Volume +/Next track
5)Volume -/Previous track
6)Bluetooth LED indicator
7)Micro USB input
8)Wireless charging /Battery indicator
9)Wireless charging area

Charging the smart table:
Charge the smart table with the included micro USB cable for 4-5 hours. The charging LED indicator will light green during charging and turn off after fully charged.

Bluetooth connection:
Long press the Power ON/OFF button more than 3 seconds, the Smart table will power ON and flash blue, enter pairing mode.

Enable Bluetooth search mode on your mobile device and search for pairing name "DRA-3550" and select it on your mobile phone.
Once the smart table is successfully paired, the Bluetooth LED indicator will be turned off.

Power button functions:
1. Long press for power on /Off
2. Short press to turn on/off wireless charging

Playing mode:
1. After connected successfully, you can play the music in your bluetooth devide with this table bluetooth speaker.
2.PLAY key:Short press for play/pause. long press to exchange Bluetooth mode and flash driver mode(MP3).
3.NEXT/V+:Short press the next song, long press volume increase.
4.PREV/V-:Short press the previous song, long press volume reduce.

MP3 Mode(Flash driver):
Keep your device turn on condition. Plug in the flash driver to play music. Long press for exchange BT/MP3 mode, click to play and pause

Wireless Charging Mode:
1. Keep the table turn on and short press the power button, the wireless charging indicator will turn on red light.the wireless charging mode start to work.
2. Put your mobile or devices authorized with QI at the table center, and then your devices will be charged.
3. Short press the power button to power off the wireless charging.
Note:Use wireless charger the battery needs to more than 50% power

Power Bank Mode:
Keep the table speaker turn on. Charge your device via the USB output by the cable.

Specifications:

Model	DRA-3550
Bluetooth version	V5.0
Product size	396*396*630mm
Bluetooth distance	≥10m (open distance)
Battery	6000mAh/3.7V
Charging input	DC 5V-2A
Speaker power	15W
Charging time	4-5H(battery empty status)
play time	3-8H(varies by volume level and content)
Distortion rate	THD<10%
Wireless charging	10W
USB output	5V/1A

Safety Notices:
Read the following recommendations before using the Bluetooth speaker.
a) Keep it dry and don't take it to damp places to avoid the product's internal circuit being affected.
b) Keep the product away from direct sunlight or hot places. High temperatures will shorten the life of electronic devices, destroy the battery or distort certain plastic parts.
c) Don't expose the product to extremely cold area. It may damage the internal circuit board.
d) Don't try to disassemble the product as it may get damaged if you are not professional. e) Don't let it fall down onto the floor or other hard surfaces. The internal circuit might get damaged.
f) Don't use intensive chemical products or detergent to clean the product.
g) Don't scratch the surface with sharp tips.